

Stationary MOBILAIR M 57 Utility

With the world-renowned SIGMA PROFILE 

Free air delivery 5.1 to 5.4 m³/min



Worldwide sales and servicing network

KAESER is one of the world's foremost compressor manufacturers and providers of compressed air systems – its products are renowned throughout the world for their outstanding quality, advanced technology and exceptional efficiency.

Represented in every major industrial nation throughout the world by a comprehensive network of international offices and authorised partners, KAESER KOMPRESSOREN is dedicated to ensuring unrivalled equipment availability and fast, reliable customer service.



Exceptionally versatile

The versatile 'M 57 Utility' requires minimal installation space and is designed, as standard, for operation in ambient temperatures from -10 to +50 °C. There is also a low temperature model for temperatures down to -25 °C. The wide range of available tools and accessories, such as tool lubricators and compressed air aftercoolers, means that the system can be precisely tailored to suit the exact demands of the working environment.



The perfect energy-saving combination: Kubota engines and KAESER airends

The M 57 Utility features a specially designed energy-saving SIGMA profile air end, which is directly driven by a water-cooled four-cylinder Kubota diesel engine. Direct drive eliminates the transmission losses associated with other systems, consequently providing more air for less fuel. A fuel filter with water separation capability further enhances reliability and is fitted as standard.

MOBILAIR M 57 Utility

Independent, Compact Compressed Air Supply System



User-friendly operation

The illuminated control panel featuring a temperature and fuel gauge is protected by a tough metal cover, whilst system monitoring and shutdown in the event of an alarm are fully automatic. Manual switchover from idle to load operation and the start switch with preheat function ensure reliable start up even on cold winter mornings.




Straightforward fuelling

Fuelling is carried out from the front face of the unit and the large fuel tank has sufficient capacity to ensure operation for far longer than a single shift.



Patented Anti-Frost Control

Both the standard and the low temperature versions of the M57 Utility are equipped with KAESER's patented Anti-Frost Control. This system is particularly useful at times of the year when ambient temperatures are lower. This not only prevents tools from freezing, but also extends air tool service life and availability.



Details that count

A fixed crane eye on the top of the unit's housing makes transportation simple and the stainless steel exhaust pipe features a protection flap. The M57 Utility complies with COM IIIA and TIER 4 interim exhaust gas emissions regulations.



Forklift-ready

Forklift pockets in the closed standard base frame ensure safe, dependable manoeuvrability via fork-lift truck. Screw-in machine feet are also optionally available.



Excellent accessibility

All maintenance access points are easily accessible once the enclosure panels have been removed from one side of the unit.



Simple oil change

Oil changes are also made simple, as the drainage points for the motor oil and compressor fluid pass through the closed floor pan to exterior of the unit.



Cool, clean compressed air


The compressed air is cooled to 7 °C above ambient temperature. Accumulated condensate is able to drain away easily, as the compressed air cooler is installed at an angle, whilst the hot exhaust gasses from the motor are also used to aid condensate evaporation. These features therefore ensure reliable frost protection during the cold winter months.

Technical Specifications – MOBILAIR M 57 Utility

Model	Compressor unit		4-cylinder diesel engine (Water-cooled)					Compressor unit				
	Free air delivery m³/min	Working pressure bar	Make	Model	Rated engine power kW	Speed at full load rpm	Idling speed rpm	Fuel tank capacity l	Operational weight kg	Sound power level dB(A)*	Sound pressure level dB(A)**	Air connection
M 57 Utility	5.1	7	Kubota	V2403	36	2450	1800	105	960	≤ 98	69	2 x G ³ / ₄ 1 x G1
	5.4					Only for export outside of the EU						

*) Guaranteed sound power level to directive 2000/14/EC – Stage 2, guaranteed sound power level – **) Surface sound pressure level to ISO 3744, (r = 10 m)

Dimensions

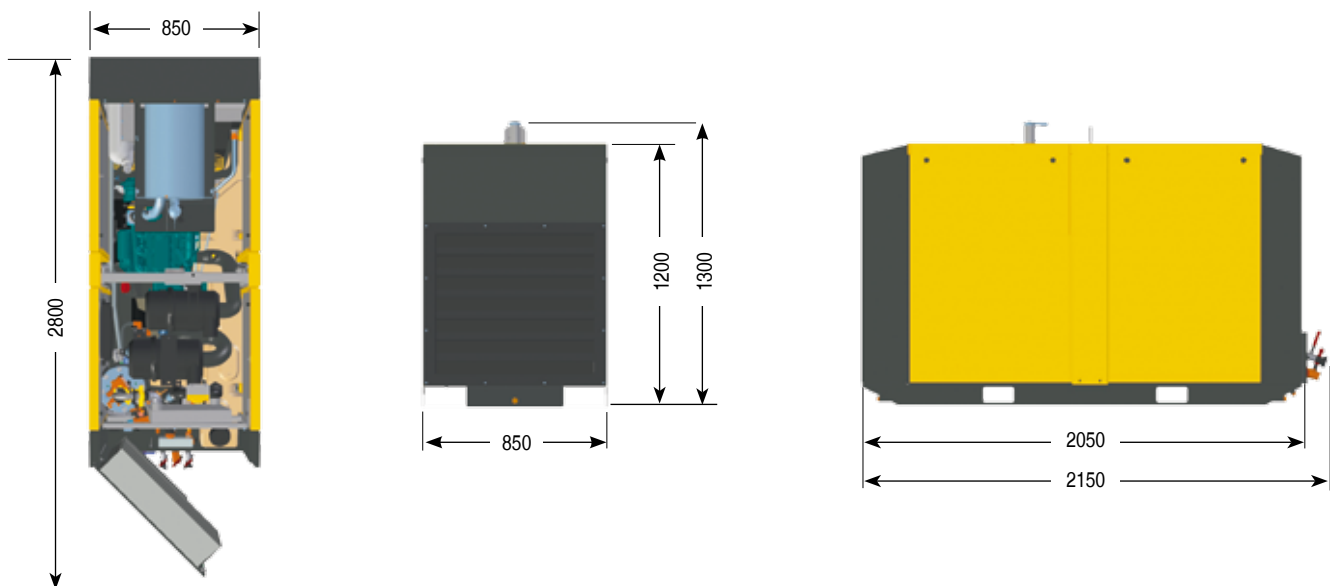

KAESER COMPRESSORS Australia Pty. Ltd.
 Locked Bag 1406 – Dandenong South – Vic. 3164
 45 Zenith Road – Dandenong – Vic. 3175
 Phone: +61 3 9791 5999 – Fax: +61 3 9791 5733
 www.kaeser.com – E-mail: info.australia@kaeser.com